



# PC 2540-6 DecoStripe

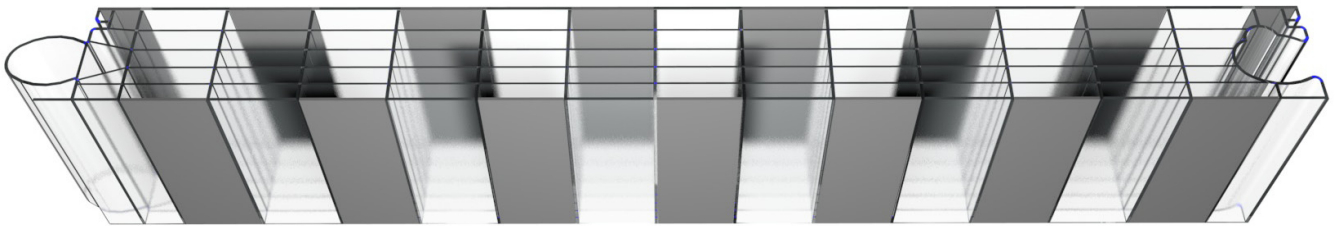

R6WULSHHVRWURUHVVDWGRGHODLGRUDHILFLHWHWHFRORJtDGHHWUMLyGH52  
 /DVSDUHGHVHWHULRUHV/GHOHOHPHWRGHFRWUFLyVUDVOLFGRSIGHWWDUSURWWDV/GHIUDV/D  
 DKRGHODFiPDUDFUHDGRHIFHWRGHGLVHxRFRGLUVR8GHVSODDPLHWRGLDJRDOGHOV  
 IUDV/DVFUHDVSHFWRGLIHUHWHVHJODORGHMLy  
 FOLHWHWLHODRSRUWGDGRVYORGHHOHJLUHOFRORUGHOFUUSRULSDOVLRWDPELpOGHODVIUD  
 GHPVODVIUDVSDVGHURGLUVHHPERVODGRVFRPRHIFHWRGHSHUVLDORVORIOLWHULRURH  
 HWHULRU5RGHFDRIUHFFRHOHOHPHWRGHFRWUFLyVUDVOLFGRR6WULSHRWURSURGWR  
 SDUDKDFHURVURFWRGHFRWUFLy

**Product properties:**

Building width:	500 mm
Thickness:	40 mm
Weight:	ca. 4,2 kg/m <sup>2</sup>
Up-value:	1,2 W/m <sup>2</sup> K
Sound insulation value:	22dB
Flammability classification:	B-s1, d0 nach EN 13501
Number of layers:	6 layer / 5 chambers
Production tolerances:	s. General information
European technical approval:	ETA-19/0452

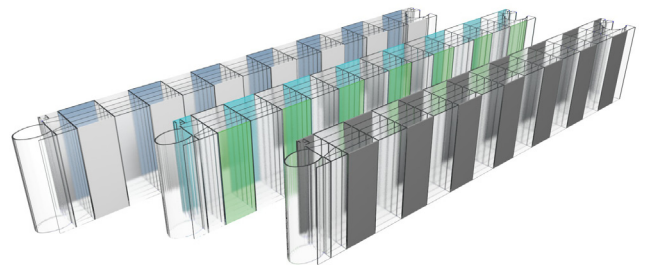

**Standard-versions:**

on both sides offset stripes in opaque white  
 on both sides offset stripes in matt black

