



Technical Data Sheet

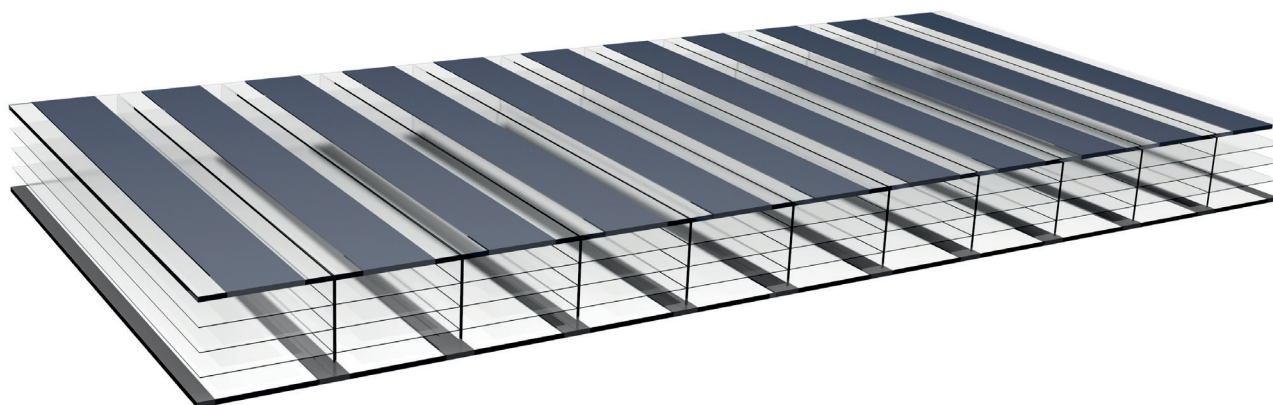

52 (OSRS DOHODSDXWHXWSS/DPSODXDRPEIDRWDP
RISWDWRIHWRKPEIDRPRXXXXXX/7XDOIPPOWSDXWHODHM
SXXORIDXXRTWRXOXXWH

R200006

Product properties	
R	630 mm - 1250 mm**
(VSHVRU	16 mm
3HVR	approx. 2800 g/m ²
(VWUWWD	5 SDUH 4 FDPDUDV
U _p -Value	2,0 W/m ² K vertical 2,1 W/m ² K horizontal
&ODVLILFDLROIR	B-s1, d0
7ROHUDLDVXSURFLR	EN 16153
7UDPLVLYO	clear - /LDVHODRRSDFR approx. 38%* clear - /LDVHUR mat approx. 18%*
3URWHFFLRV	coextruded UV-protectHFFLRDPEDVFDUDV
LVLR9	< 1 %, wavelengths until 380 nm stopped almost a 100 %
&RHILFLHWHHSXLYWHUPLFD	0,065 mm/m/°C
&RORUHV	Clear - stripes white opaque or black mat further combinations (on request**)

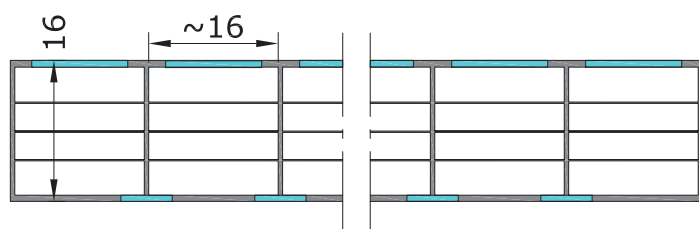

*VORUHVEDVVRHFLRVLWHUDV

**DWLDRLEPDSH

/RVSRWRV52OHDPPDUF&(KDLRSURERVVHIIHMHVFLVHULRV/SRWRVVRM/URDVSRUODERUDWRULRSURSLRUDMVDVFDLDZHDHMD
TODVSODFDVPLWLSDUHEHOHOPDUFDB&(BDFBUBFRDDBUPDSURWR(16LPEDURHOPDUFDB&(ODVSODFDVPLWLSDUHVVWLWDRVUHTVLRVODV
SUEDEVRHODFLYRDRVFRWUFLYHDPHWRVFRWUFLYDVRFLDRVeVVDVVEHWHUWHVHMDREOLDWRULDPHWSRUHOSURFWLWDLVWDDUMLHV
FHVLDLRHOFOLHWHHSXLYWHUPLFD
WRVWHWRVDFPELV