


The multi wall sheet PC 16-5 DecoStripe is another result of the innovative and high-performance extrusion technology of **RODECA**. The main body is clear and the outer shells are provided with broad shading lines. This technique offers both a shading and a unique design effect. The stripes introduced into the multi wall sheet during extrusion can be colored according to customer requirements.

Rodeca Multi Wall Sheets

| Product properties | |
|---------------------------------|---|
| Building width | 630 mm - 1250 mm** |
| Thickness | 16 mm |
| Weight | approx. 2800 g/m ² |
| Structure | 5 layers / 4 chamber |
| U _p -Value | 2,0 W/m ² K vertical 2,1 W/m ² K horizontal |
| Flammability classification | B-s1, d0 |
| Production tolerances | EN 16153 |
| Light transmission values | clear - stripes white opaque approx. 38%* clear - stripes black mat approx. 18%* |
| UV-protection | coextruded UV-protective layer on both sides |
| UV-admission | < 1 %, wavelengths until 380 nm stopped almost a 100 % |
| Coefficient of linear expansion | 0,065 mm/m/°C |
| Colours | Clear - stripes white opaque or black mat further combinations (on request**) |

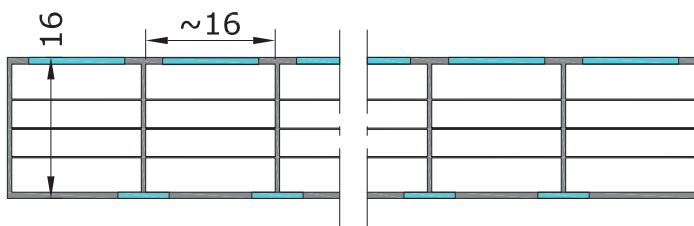

*Values are based on internal measurements
**Minimum quantities are mandatory

RODECA Products are CE-marked and tested according to different criteria. The products are monitored by own laboratory and quality assurances. Please consider that multi wall sheets have to be CE-marked according to product standard EN 16153. However, the CE-marking of multi wall sheets does not replace the requirements of usability proofs in connection with associated building codes / building regulations. These must be mandatorily considered from planner / installer and, if necessary, a corresponding proof of usability must be provided by customer. Data subject to change.